


# Hydraulica 1000-B

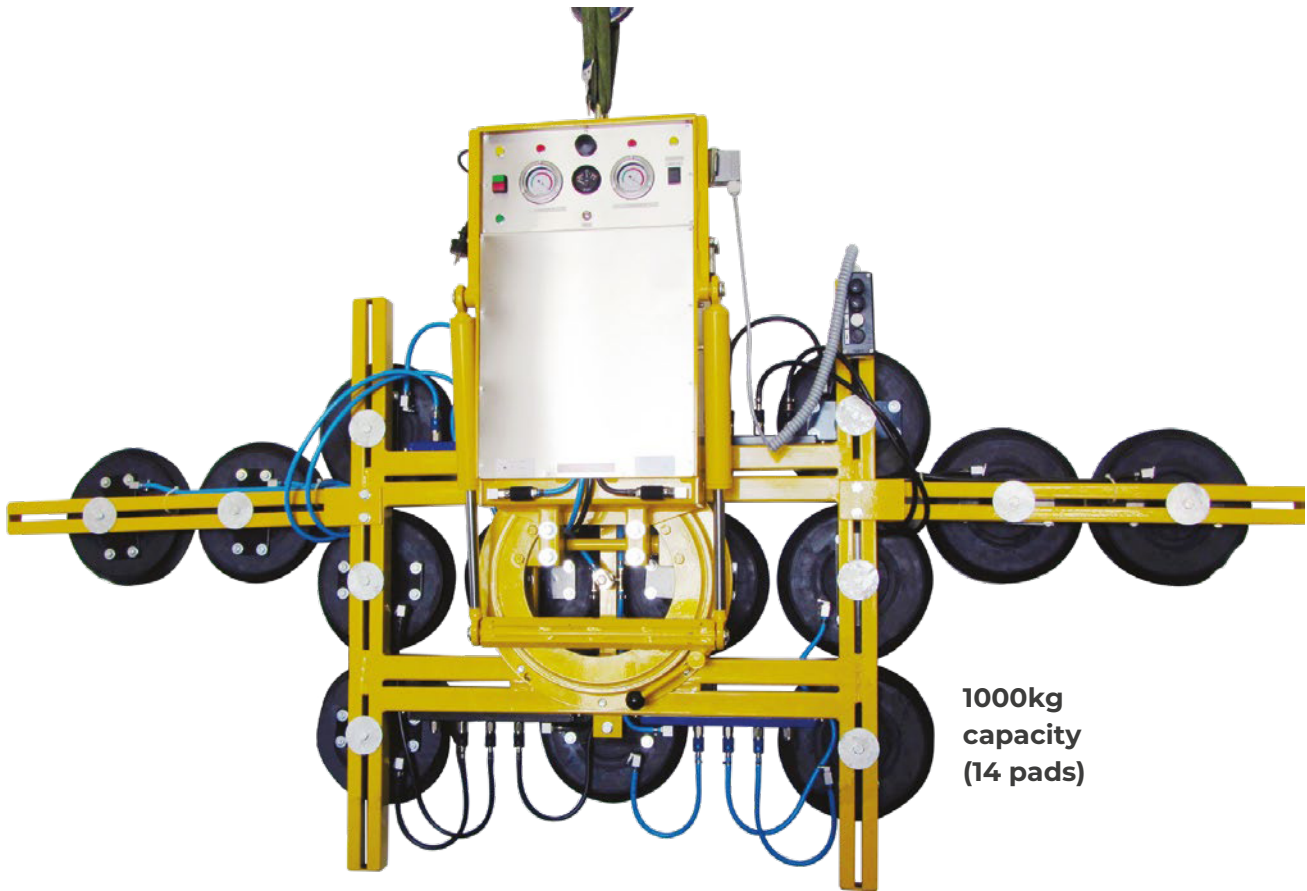

1000kg  
capacity  
(14 pads)

## Key Features

- Capacity: 1000kg
- Dual circuit vacuum system with reserve tank, non-return valve and vacuum gauge for each circuit
- Powered hydraulic 90° tilt from vertical to horizontal Manual 135° left & right lockable rotation
- Two or four on-board maintenance-free vacuum pumps
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- Two extension arms with variable position pads supplied as standard
- Audio-visual low vacuum warning
- Cable remote control as standard
- Individual pads can be isolated to accommodate irregular shapes (reduces safe working load)
- Two hydraulic arms

## Powered Tilter With Dual Hydraulic Rams

The Hydraulica 1000-B is the newer version of our popular Hydraulica 1000-A model. The new model is also a versatile ten to fourteen pad lifter that comes with two extension arms as standard, increasing capacity from 750kg to 1000kg and offering additional stabilisation of larger loads.

This newer version also comes with two hydraulic rams for seamless power tilting and a user-friendly enclosed control panel.

Glass, metal and non-porous materials can be safely and easily tilted from upright to horizontal position with the Hydraulica's 90° powered tilt function. Manual 135° left and right lockable rotation is also included as standard along with cable remote control.


## 1000kg

Safe Working Load



Cable remote control as standard

**750kg**  
**capacity**  
**(10 pads)**

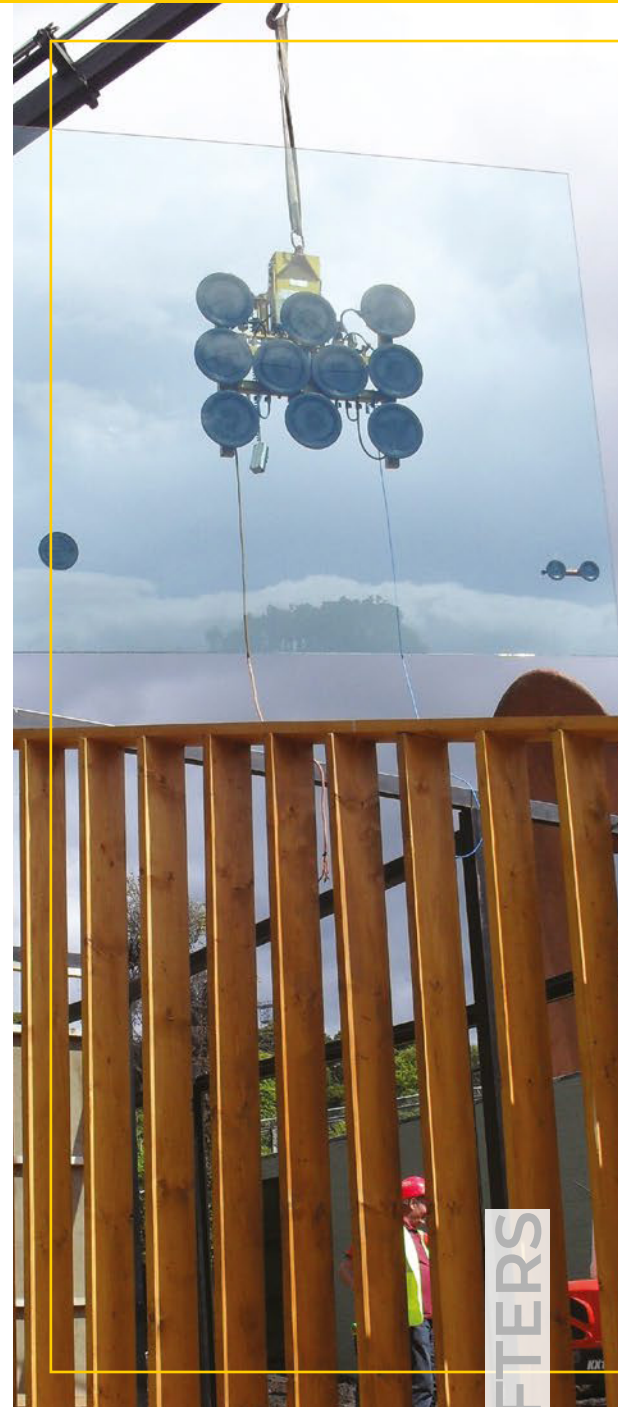

### Technical Specifications

<b>Safe working load</b>	capacity:	1000kg*	750kg
(smooth, clean surface at 60% vacuum)			
<b>Number of suction cups</b>	cups:	14	10
<b>Suction cup</b>	description:	black rubber, not abrasion resistant, heat resistant up to 100 ° F	
<b>Suction cup diameter</b>	diameter:	330mm	
<b>Suitable for lifting</b>	material properties:	gastight / non-porous	
	surface:	smooth	
	example:	glass, plastic boards, ceramic plates, sheet metals, coated boards	
<b>Weight of lifter</b>	approx:	177kg	120kg
		(with arms)	(without arms)
<b>Depth of lifter</b>	depth:	300mm	
<b>Rotation</b>	rotation:	135° manual left & right lockable	
<b>Tilt</b>	tilt:	90° powered hydraulic	
<b>Vacuum system</b>	dual circuit:	2 or 4 pumps, 2 vacuum reserve tanks	
<b>Voltage</b>	pump:	12v DC from x 2 rechargeable batteries	
	battery charger:	110v/240v 50/60Hz single phase factory selectable	
<b>Standard accessories</b>	standard	2 x extension arms with pads, cable remote control	
<b>Optional accessories</b>	optional	2 x curved extension arms with pads (500kg capacity), wheeled stand, radio remote control, low marking pads	

\* The capacity is only 1000kg with extension arms and 14 pads fitted.

### Technical Data (mm)

