


# Hydraulica 2600

## Quad-Circuit Compact


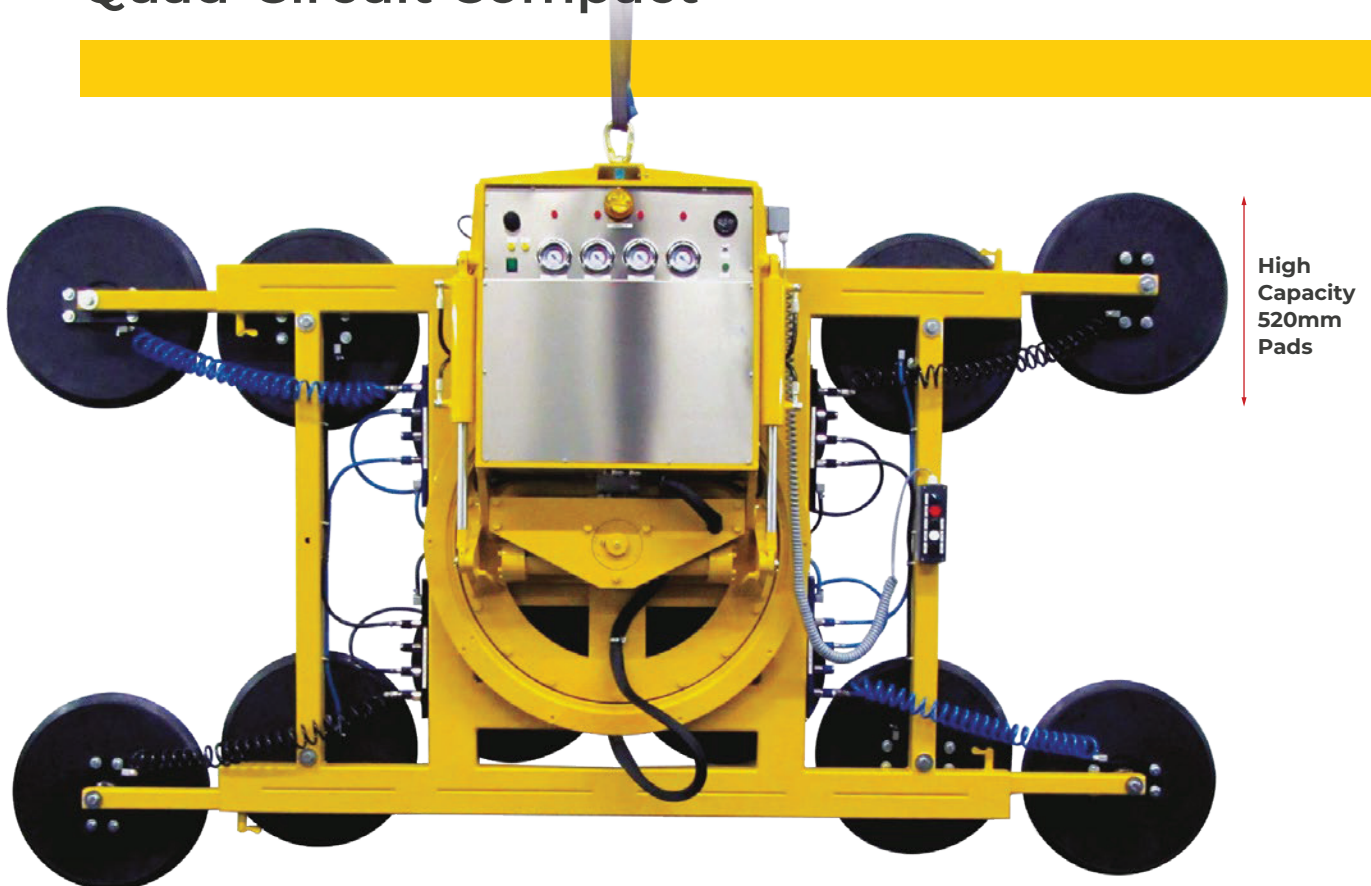


### Quad-Circuit Heavy-Duty Lifting Power

Bringing the latest in modern vacuum lifting technology to the market, the Hydraulica 2600 Quad-Circuit Compact boasts four independent vacuum circuits for quicker, safer and more efficient lifting performance on site.

Retaining all the benefits of our standard Hydraulica 2500 lifter, the innovative Hydraulica Quad-Circuit also has a more compact frame for lifting glass under tricky soffits and overhangs, as well as larger 520mm vacuum pads to achieve quicker vacuum suction.

Features 210° powered rotation and 90° hydraulic tilt for easy control of heavy loads.



#### Key Features

- Capacity: 2600kg
- Four vacuum circuits with 4 on-board maintenance free vacuum pumps
- Powered 210° lockable rotation
- 90° hydraulic tilting
- Audio-visual low vacuum alert
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- Wheeled stand for transport and storage available
- Cable remote control as standard, optional radio remote
- Individual pads can be isolated for irregular units
- Sliding extension arms

## 2600kg


Safe Working Load




### Technical Specifications

<b>Safe working load</b> (smooth, clean surface at 60% vacuum)	capacity:	2600kg*	1850kg
<b>Number of suction cups</b>	cups:	12	8
<b>Suction cup</b>	description:	black rubber, not abrasion resistant.	
<b>Suction cup diameter</b>	diameter:	520mm	
<b>Suitable for lifting</b>	material properties:	gastight / non-porous	
	surface:	smooth	
	example:	glass, plastic boards, ceramic plates, sheet metals, coated boards	
<b>Weight of lifter</b>	approx:	640kg (with 12 pads)	
<b>Depth of lifter</b>	depth:	385mm	
<b>Rotation</b>	rotation:	105° left & right powered hydraulic	
<b>Tilt</b>	tilt:	90° powered hydraulic	
<b>Vacuum system</b>	dual circuit:	4 pumps, 4 vacuum reserve tanks	
<b>Voltage</b>	pump:	12v DC from rechargeable batteries	
	battery charger:	110v/240v 50/60Hz single phase factory selectable	
<b>Standard accessories</b>	standard	cable remote control, extension arms, wheeled stand	

\* The capacity is 2600kg with extension arms and 12 pads fitted.

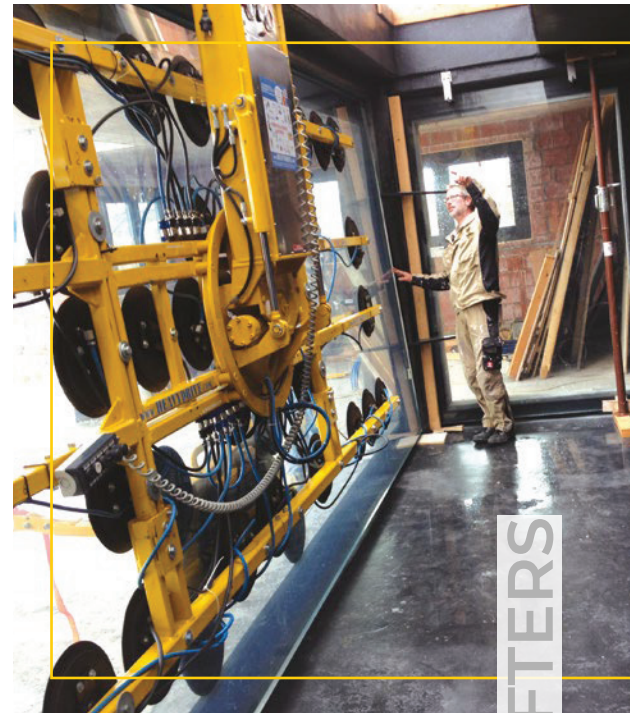

### Technical Data (mm)

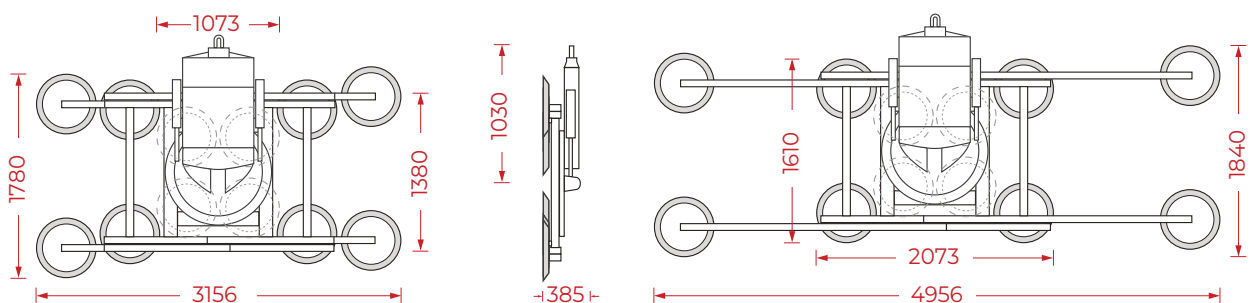

VACUUM LIFTERS