


DT15 SPYDER

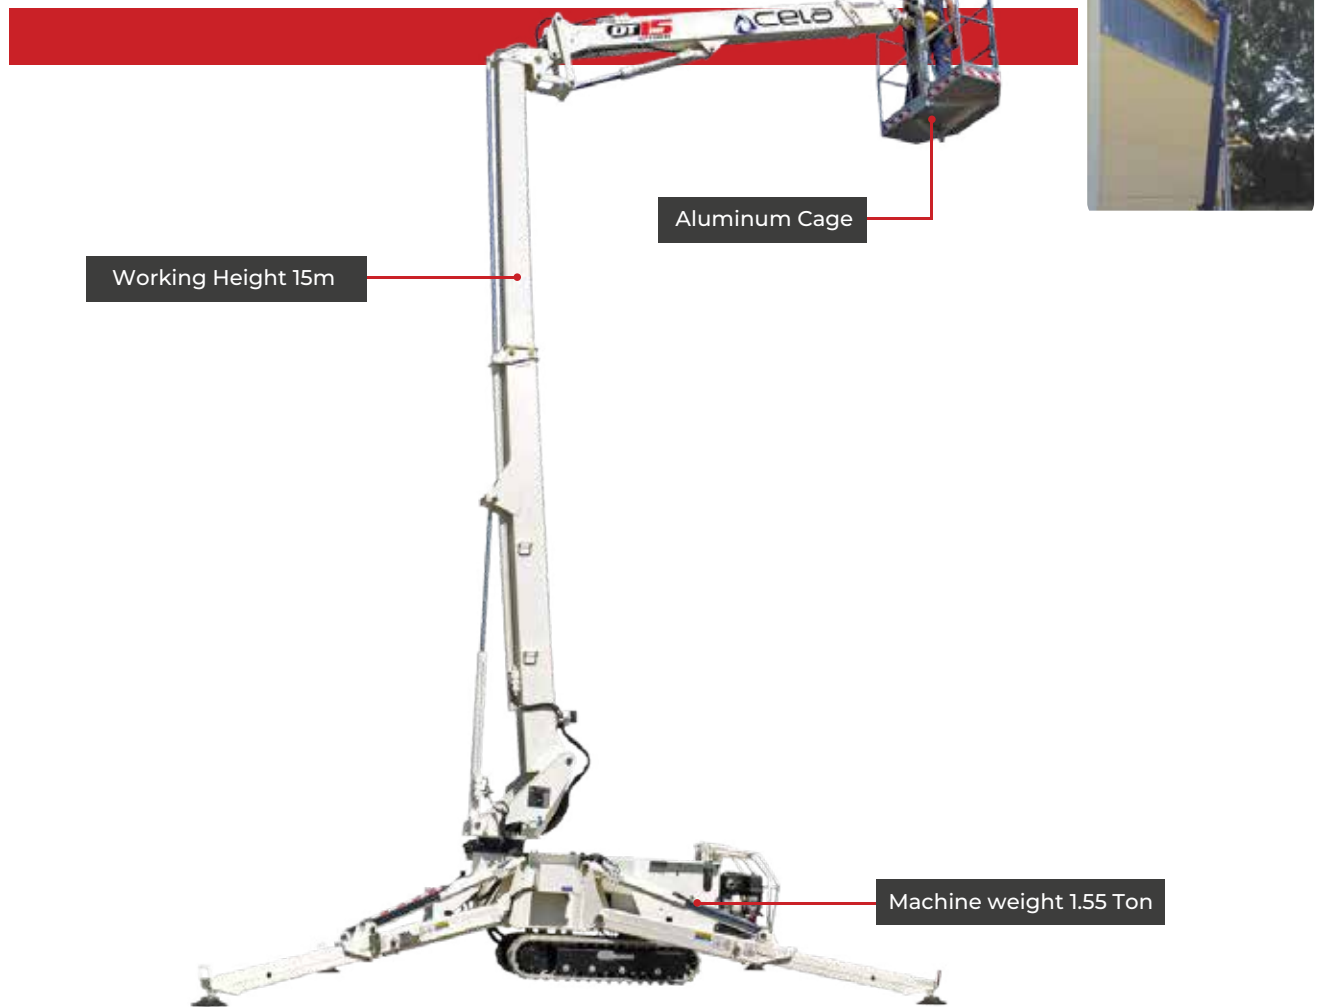

CELA ACCESS PLATFORMS

Spider Plus sells Self Propelled Access Platforms. We are one of the most specialized operators of this type of equipment in the market and our operations and maintenance teams are highly experienced in their respective areas. Self propelled access platforms are a unique solution to confined space lifting. Small enough to fit through a single or double doorway, they can lift up to a capacity of 260kg. Their compact nature means that they are well suited to a variety of complex maintenance problems faced by project teams operating with limited space.

Remotes

Electronic + Radio

Operators can safely manage the machines from outside the basket using a radio console which gives full control over the hydraulic boom, knuckle and jib.




Technical Specifications

Working Height	15 m
Max. Reach horizontal	12.0 m
Brace support length	3.6 m
Platform length	1.4 m
Lateral range	9 m / 200 kg
Slewing angle	7200
Radio Remote Control	Standard
Clearance Height	1.95M
Basket Rotation	-90 +90
Basket Capacity	230Kg
Hook Capacity	260Kg
Power	230 Volt Single Phase
Automatic	Automatic Folding
Automatic	Automatic Stabilization
Machine weight	2.95 Ton
Below Ground (Down Reach)	-5 m
Travel speed	0 - 2 km / h


15m

Working Height


Working Envelope

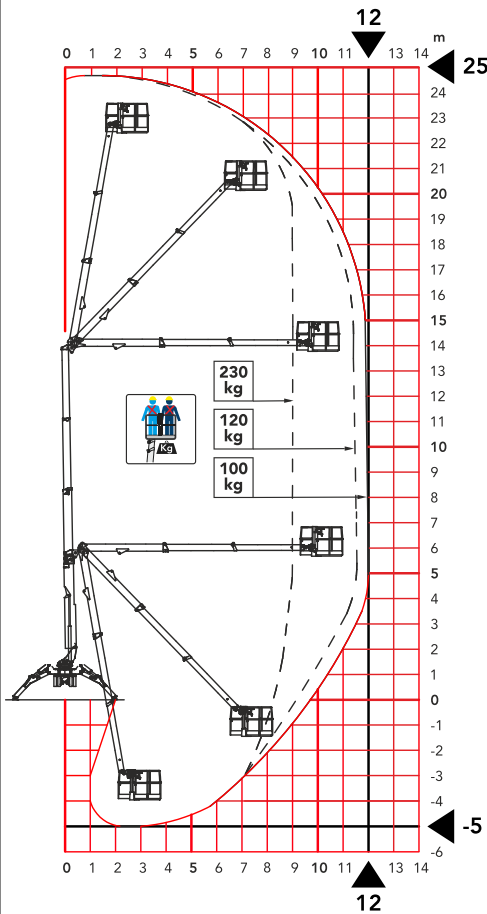


Horizontal Reach And Out Reach Position

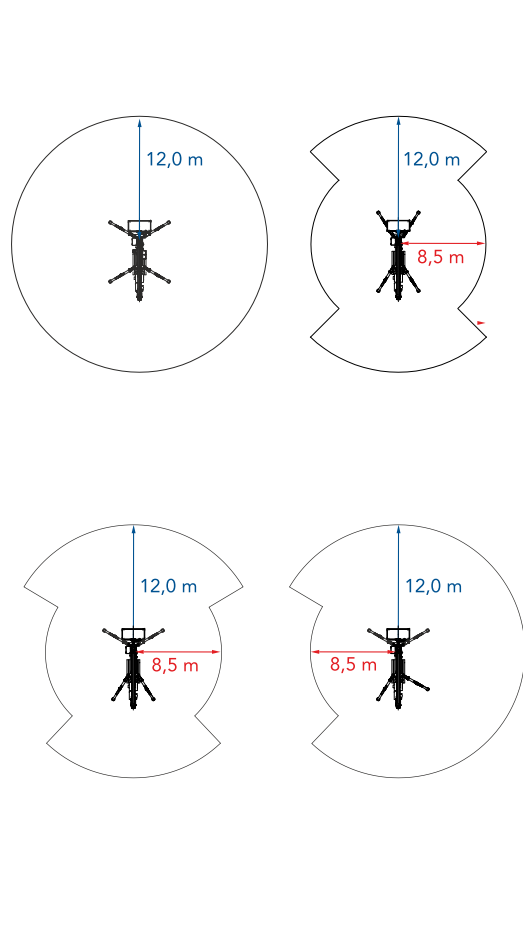


Passiamo sopra ogni cosa
We fly all over




Sbarco in quota autorizzato
Authorized height landing




Come un ascensore
Like an elevator



Dimensions

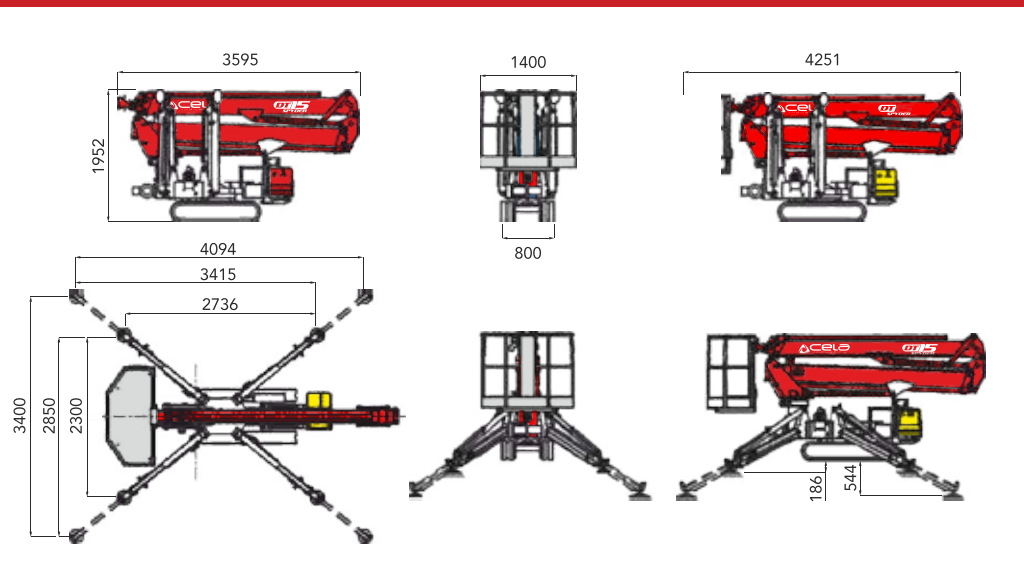

Tutto in uno
All in one



15m

Working Height

Standard equipment for DT15

"Cela Easy Drive" driving system
230V electric connection in the cage
5 m length wired controller
Acoustic warning from the cage
Automatic stabilization device
Cage - Aluminium 1400x700 mm , two joints
Emergency hand pump
Flanged lock valves on cylinders
Fully compensated hydraulic system with high pressure filtering system
Fully electronically operated
Hour counter
Manually extendable outriggers
Multi-axial level
One-cylinder petrol 12 HP air cooled Honda motor (compliant to CHINA 3 - USA TIER 4 - EU STAGE 5 non road machinery regulations)
Painting - Cylinders, turret and pistons: White RAL 9010
Painting -Mainframe: White RAL 9010
Painting - Telescopic booms: White RAL 9010
Remote management and diagnostic software (CRSS)
Start/Stop engine from the cage
Streamlined emergency controls
Turret rotation 720°



15m

Working Height



List of available options

- 110V/60Hz mono-phase electro pump, with battery charger
- 230V/50Hz mono-phase inverter controlled electro pump, with battery charger
- Air/Water connection between cage and turret, max pressure 100bar
- All function radio control
- Anti-dust brushes for boom protection
- Blinking lights on outriggers
- Cage - Aluminium 700x700x1100 mm

- Customized stickers with customer logo
- One-click auto-closing function
- One-click auto-opening function
- Safety harness
- Special painting - Mainframe (included)
- Special painting - Upper part, cylinders and outriggers (included)
- White non-marking tracksz

Suggested options

- 230V/50Hz mono-phase electro pump with battery charger, inverter controlled with battery charger
- Air/Water connection between cage and turret, max pressure 100bar
- Anti-dust brushes for boom protection
- All function radio control
- One-click auto-closing function