

URW-546

- Total width 1.4m
- Max working radius 15.52m
- Tier 4 diesel engine powered and optional mains electric
- Zero length increase with electric option
- Operator control of outrigger extension
- Intelligent voice warning system
- Radio remote control as standard
- Working area limitation
- Slew limitation (optional)
- Intelligent throttle activation for economy and ecology



Safe load indicator




Capacity 4.0t x 2.5m

Weight
4940 - 5090kg

Max. Boom
Length: 15.71

Max. Lifting
Height 16m

Optional fly jib & searcher hook

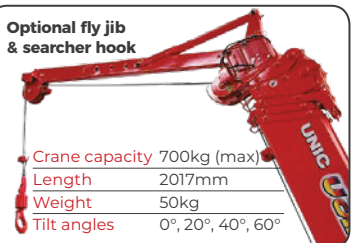

Crane capacity 700kg (max)
Length 2017mm
Weight 50kg
Tilt angles 0°, 20°, 40°, 60°

The URW-546 offers an optimal combination of working flexibility and heavy lifting power.

This crane is capable of lifting 4 tonnes at 2.5m and features a maximum lifting height of 16m. The UNIC URW-546 sees the addition of a new clean emissions, tier 4 diesel engine, making it fully compliant with the latest emissions regulations. The URW-546 mini crane can be controlled from the drivers seat or via a radio remote control for precise lifting and placement of loads. At just 1.4m wide, the UNIC URW-546 is ideal for passing through internal doorways and working in confined areas where working space may be limited.

Crane Specifications

Crane capacity	capacity:	4.0t x 2.5m
Max working radius	max:	15.52m
Max lifting height	approx:	16m (17.79m with fly jib, 18.46m with fixed hook)
Rope length	max:	20.52m (4 fall), 42.54m (2 fall), 86.57m (1 fall)
Dimensions	folded:	4870mm (l) x 1400mm (w) x 2035mm (h)
Weight	unladen:	4940kg (5090kg with electric option)
Point loadings	Due to the many variables involved, point loadings are only available on request	
Hook speed	approx:	11m/min (with 4 layers and 4 falls)
Telescopic system	boom length:	3.93 - 15.71m
	telescoping speed:	11.78m / 35 seconds
	boom type:	6 section hydraulically telescoping boom, hexagonal box construction
Derricking angle/speed	approx:	0 - 80° / 18.0 seconds
Slewing angle/speed	approx:	360° (continuous) 2.5min rpm
Traction system	drive:	hydrostatic 2-speed, stepless forward and reverse
	travel speed:	0 - 3km/h
	gradeability:	± 20° (vertical) 20° (traverse)
	track ground length:	1750mm
	track ground pressure:	46.1kPa (0.47kg/cm2)
	track width:	300 mm
Engine	manufacturer:	Tier 4 Yanmar
	drive:	diesel (electric dual power option)
	maximum output:	15.2kW (20.7PS) / 2500min rpm
	starting method:	electric
	tank capacity:	40 litres
Electric motor	power	7.5 kW
	tank capacity	400v AC 50/60Hz
Standard equipment	computer controlled moment limiter (safe load indicator), radio remote control, overwinding alarm, computer, controlled intelligent voice warning system, multi-function operation by radio remote control, intelligent throttle, activation, automatic hook stow, overload warning alarms, overload warning lamps, working area limitation	
Optional equipment	1 fall hook block, 2 fall hook block, mains electric dual power (400v), low marking tracks, slew limitation, searcher hook small 500kg, searcher hook 700kg, fly jib 700kg with single part line, radio remote control with feedback display, data logging, forward facing camera	

Remotes





Standard radio remote control

Safe Working Load

SPIDER PLUS

Rated Loads & Outrigger Positions

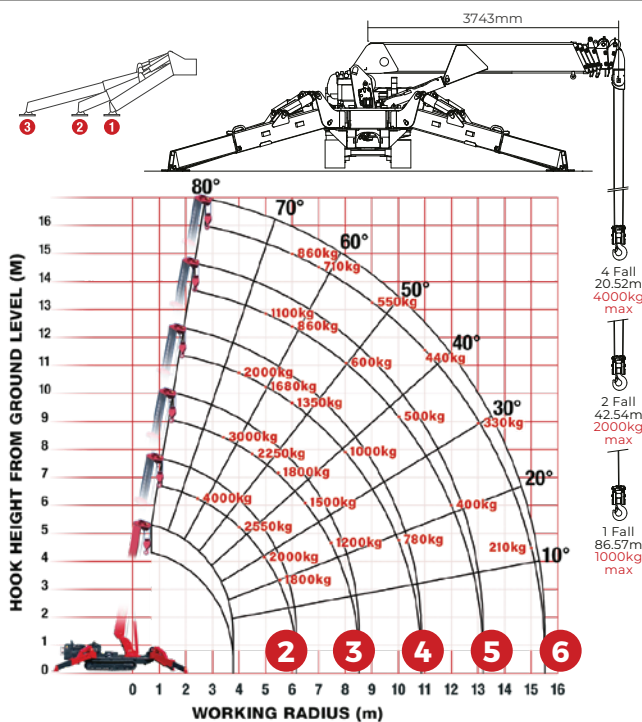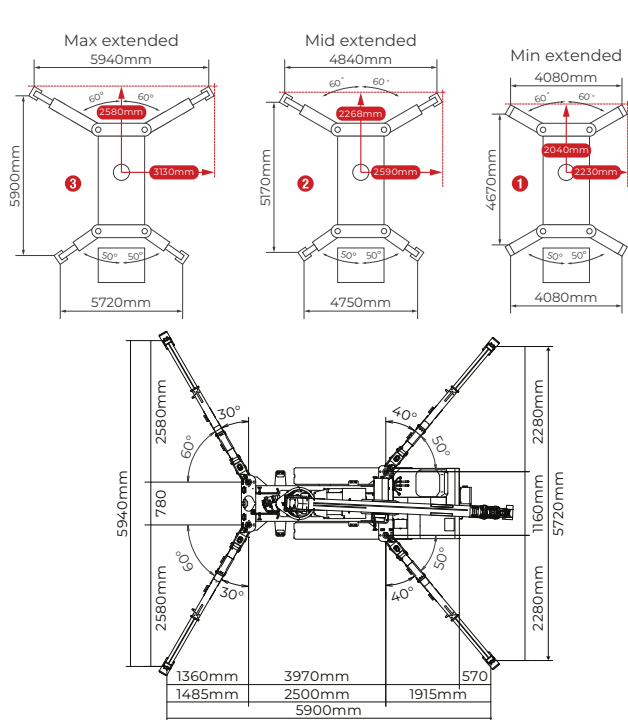

SECOND STAGE EXTENDED 3.93 - 6.33m BOOM LENGTH

[illegible]

THIRD STAGE EXTENDED 6.33 - 8.72m BOOM LENGTH

[illegible]

FOURTH STAGE EXTENDED 8.72 - 11.05m BOOM LENGTH

[illegible]

FIFTH STAGE EXTENDED 11.05 - 13.38m BOOM LENGTH

[illegible]

SIXTH STAGE EXTENDED 13.38 - 15.71m BOOM LENGTH

Working radius		m	up to 6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	15.52
Outrigger	Max-extended	kg	860	710	600	550	500	440	390	330	270	210	160
	Mid-extended	kg	860	500	350	300	270	250	220	200	170	160	1510
	Min-extended	kg	860	500	350	300	250	230	200	170	150	150	100

Searcher Hook Small - 500kg

Stowed position

In operation



Crane capacity	500kg sections 1-5
	480kg section 6


Length 800mm

Weight	20kg
--------	------

Angles	$0^\circ, 20^\circ, 40^\circ, 60^\circ$
--------	---


Searcher Hook

Maximum Load 350kg - 700kg
(radius rated) / **20°**



Fly Jib

Maximum Load 350kg - 700kg
(angle rated)



Dimensions

