GANTERUD L12 Pro










GANTERUD L12 PRO

The L12 Pro levelling device uses both new and proven technology to level loads efficiently and safely with a high degree of precision. The levelling equipment can handle both light and heavy objects from o kg up to 12 tonnes. Here, the L12 Pro can be used as a snatch block. The chain wheel is disengaged using the remote control for free-running chain with the same function as a snatch block. Longer chain packages can be ordered as an option. The L12 Pro has a reversible stroke length of up to 4 metres per hook and can be precision levelled at two speeds. The L12 Pro levels the objects it is lifting easily and safely with the simple press of a button, reducing both expensive crane time and waiting times. Thanks to its robust, tried and tested technology, combined with reliable electrical operation, the L12 Pro is able to operate in temperatures ranging from -20 to +40 degrees Celsius in demanding environments.



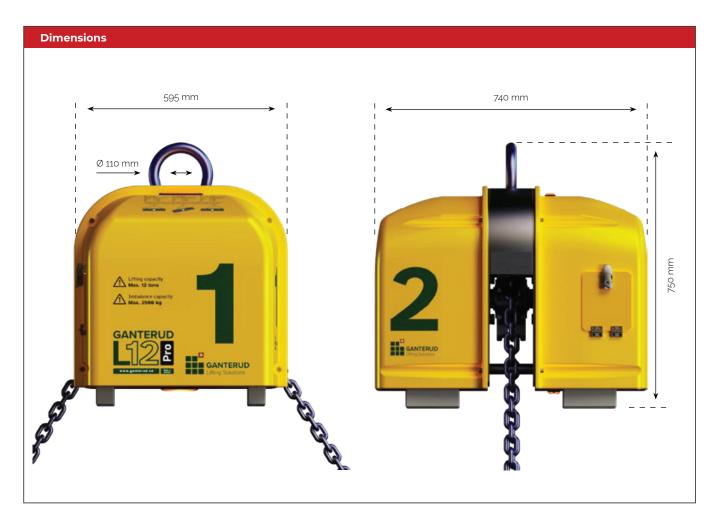

Technical Specifications	
Lifting capacity	Max. 12 tons
Load imbalance capacity	Max. 2.5 tons
Max. levelling length	4m (2m in both directions) in the standard version
Two levelling speeds Max.chain angle	60° at 12 ton load
Total chain length	4m in the standard version
Chain dimensions	48 x 16 mm
Unloaded weight	approx. 295Kg (incl. chain and hook)
Height	750mm
width	740mm
Depth	595mm
Radio range	100m unobstructed view
Voltage, elevtric motor	24 VDC
Power consumption, rest	50mA
Power consumption, max. continuous	24A
Power consumption, peak	30A
Operating temperature	-20°C to +40°C
Storage temperature	-20°C to +45°C
Relative humidity (RH)	0-90% during storage

Optional

- Protective cover
- Chain kit in other lengths
- Extra batteries
- Transport packaging

