



# Hydraulica 1000-A

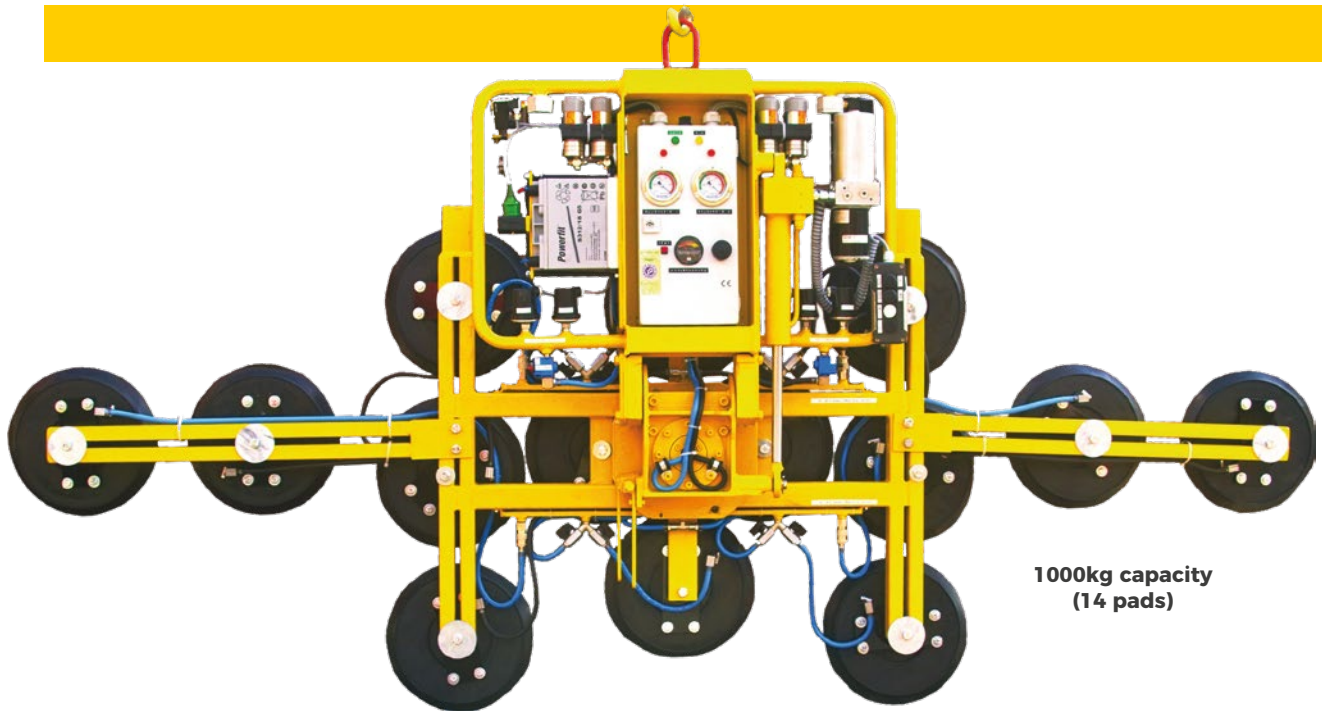

1000kg capacity  
(14 pads)

Optional curved arm  
adaptor kit  
(Capacity 500kg)

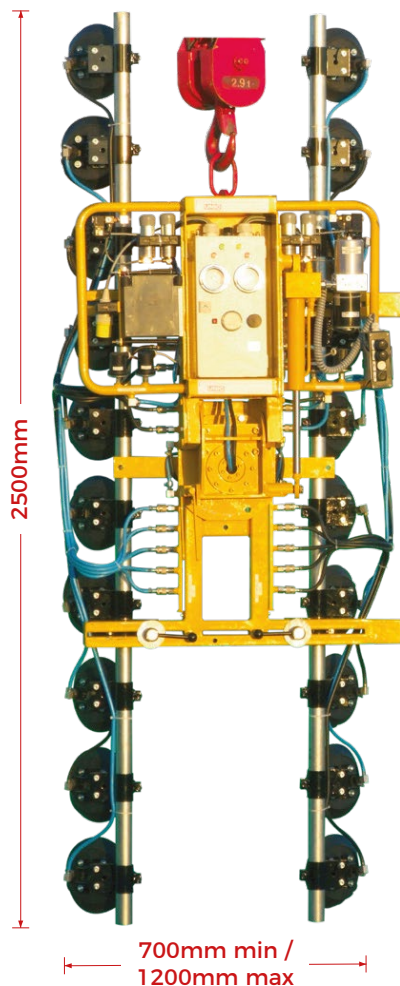

## Excellent Hydraulic Tilt Lifting Power

The Hydraulica 1000-A is a versatile ten to fourteen pad lifter that comes with two extension arms as standard, increasing capacity from 750kg to 1000kg and offering additional stabilisation of larger loads.

Glass, metal and non-porous materials can be safely and easily tilted from upright to horizontal position with the Hydraulica's 90° powered tilt function. Manual 135° left and right lockable rotation is also included along with a cable remote control.

### Key Features


- Capacity: 1000kg
- Dual circuit vacuum system with reserve tank, non-return valve and vacuum gauge for each circuit
- Powered hydraulic 90° tilt from vertical to horizontal
- Manual 135° left & right lockable rotation
- Two or four on-board maintenance-free vacuum pumps
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- Two extension arms with variable position pads supplied as standard
- Audio-visual low vacuum warning
- Cable remote control as standard
- Individual pads can be isolated to accommodate irregular shapes (reduces safe working load)

# 1000kg


## Safe Working Load




Cable remote control as standard



Optional Hydraulic wheeled trolley

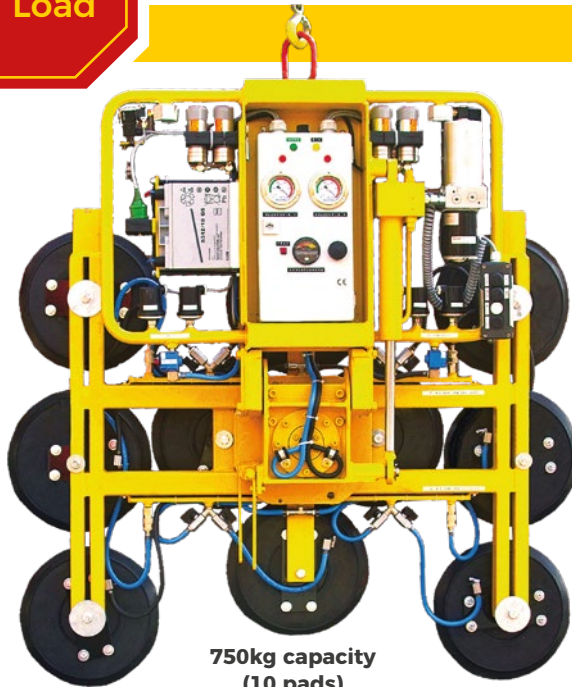

750kg capacity (10 pads)

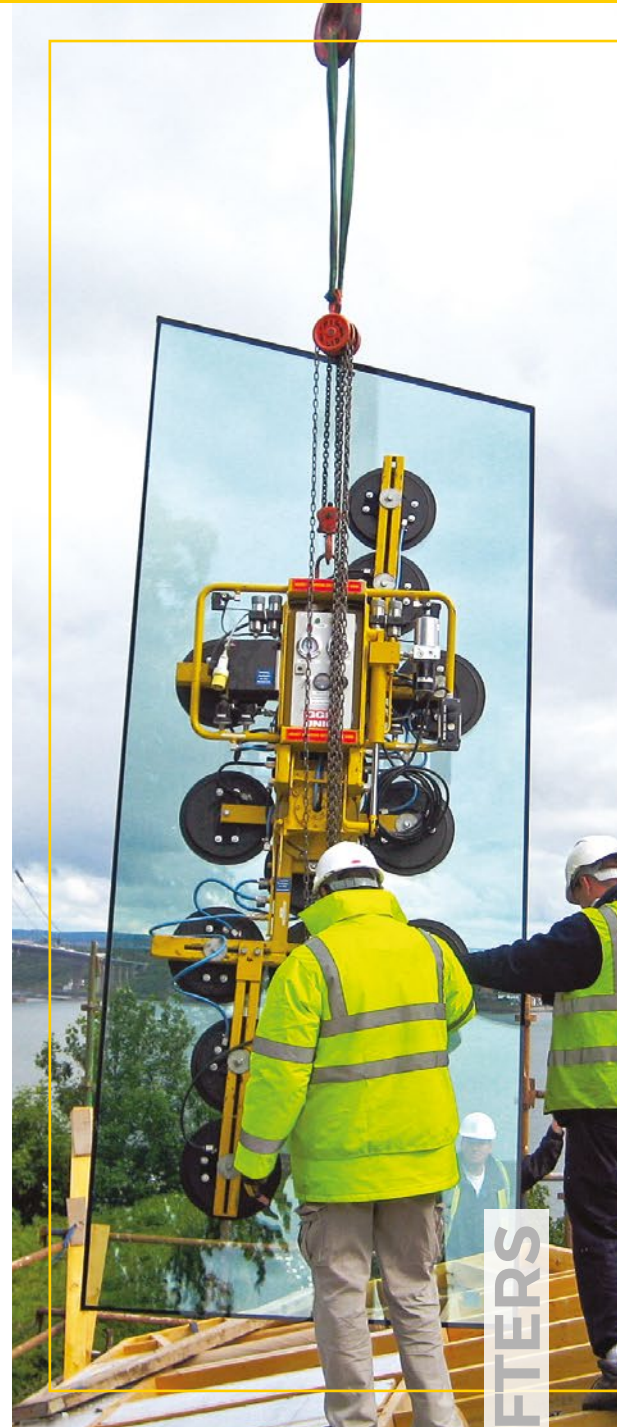


### Technical Specifications

<b>Safe working load</b>	capacity:	1000kg*	750kg
<small>(smooth, clean surface at 60% vacuum)</small>			
<b>Number of suction cups</b>	cups:	14	10
<b>Suction cup</b>	description:	black rubber, not abrasion resistant	
<b>Suction cup diameter</b>	diameter:	330mm	
<b>Suitable for lifting</b>	material properties:	gastight / non-porous	
	surface:	smooth	
	example:	glass, plastic boards, ceramic plates, sheet metals, coated boards	
<b>Weight of lifter</b>	approx:	177kg (with arms)	120kg (without arms)
<b>Depth of lifter</b>	depth:	300mm	
<b>Rotation</b>	rotation:	135° manual left & right lockable	
<b>Tilt</b>	tilt:	90° powered hydraulic	
<b>Vacuum system</b>	dual circuit:	2 or 4 pumps, 2 vacuum reserve tanks	
<b>Voltage</b>	pump:	12v DC from x 2 rechargeable batteries	
	battery charger:	110v/240v 50/60Hz single phase factory selectable	
<b>Standard accessories</b>	standard	2 x extension arms with pads, cable remote control	
<b>Optional accessories</b>	optional	2 x curved extension arms with pads (500kg capacity) increases weight of lifter to 150kg.	

\* The capacity is only 1000kg with extension arms and 14 pads fitted.

### Technical Data (mm)

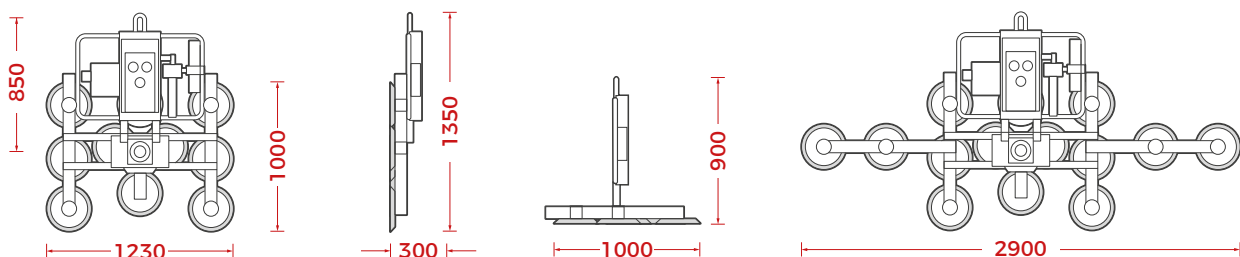

VACUUM LIFTERS