
Hydraulica 900C

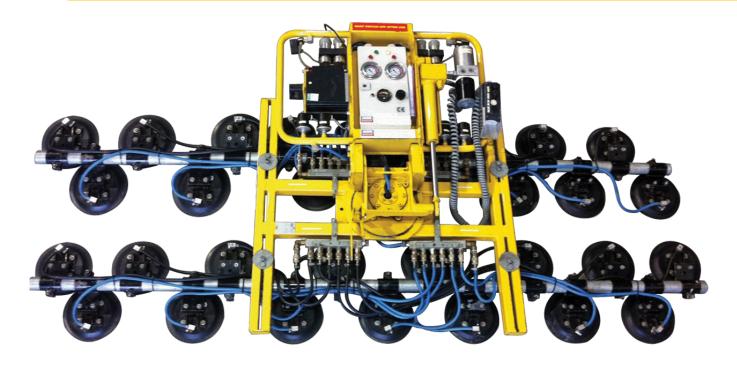

Curved Glass Lifting Made Easy

Effortlessly lift, tilt and rotate curved glass with the Hydraulica 900C bespoke vacuum lifter.

This mid-capacity model offers 900kg of lifting power and uses 30 vacuum cups set across two swivel arms to securely attach to convex or concave surfaces.

Like our other Hydraulica models, the 900C benefits from powered 90° tilt for smooth unloading and positioning of the glass, making it an ideal machine for installing revolving doors and curved glass units.

Safety features include two independent vacuum systems and low vacuum alarm to ensure the glass is always securely attached to the lifter.

Powered hydraulic tilt system

Key Features

Capacity: 900kg

• Manual 270° lockable rotation

• Powered 90° hydraulic tilt

• Two or four on-board maintenance free vacuum pumps

Dual circuit vacuum system with reserve tank,

non-return valve and vacuum gauge for each circuit

- 12v rechargeable battery with integral 110v or 240v charge and battery energy gauge
- Audio-visual low vacuum warning
- Cable remote control as standard



Flexible pads and swivel arms to attach to convex or concave loads

enquiries@spiderplus.ae I enquiries@spiderplus-ksa.com

UAE: +971 4881 7775 | KSA+ +966 592978697









Technical Specifications capacity: 900kg Safe working load (smooth, clean surface at 60% vacuum) Number of suction cups cups: 30 **Suction cup** description: black rubber, not abrasion resistant. Suction cup diameter diameter: 220mm Suitable material properties: gastight / non-porous for lifting example: glass, plastic boards, sheet metals, coated boards Weight of lifter approx: 210kg Depth of lifter depth: 300mm Rotation rotation: 135° manual left & right lockable 90° hydraulic Vacuum system single circuit: 2 or 4 pumps, 2 vacuum reserve tanks pump: 12v DC from rechargeable battery Voltage battery charger: 110v/240v 50/60Hz single phase factory selectable Standard accessories standard cable remote control **Optional accessories** optional radio remote control, wheeled trolley



Cable remote control as standard



Dual circuit vacuum system

